

SMART STACKER XXS



- Minimal footprint
- Height continuously adjustable
- Suitable for 2- and 4-up
- Low-cost shipping

The Smart Stacker XXS has been developed in order to enable CtP users in the 2- and 4-page format a space-saving and cost-effective possibility of plate stacking.

On a footprint of only 640 x 658 mm, up to 100 plates are automatically stacked by that stable „lightweight“ made in Germany.

Low-cost shipping due to a package size of 118 x 78 x 17 cm (L x W + H) and weight of only 17 kilograms.

The transfer height and stack depth can be finely adjusted to allow perfect integration with any CTP device or processor.

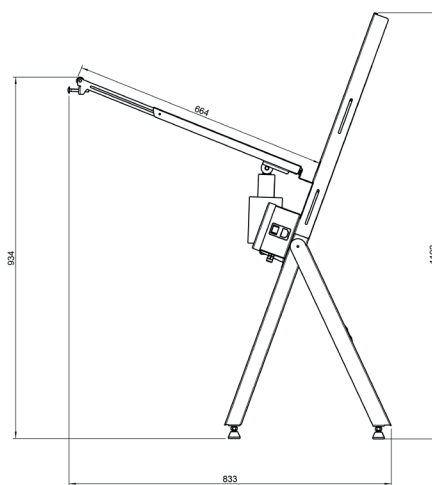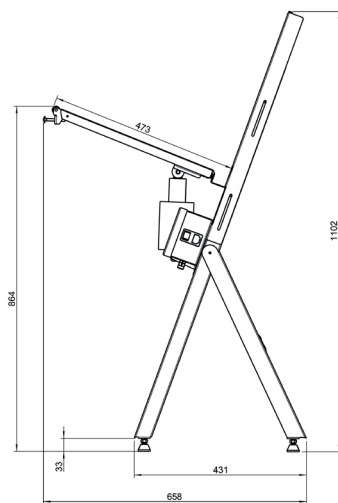

FLOOR SPACE: 640 X 658 MM

HEIGHT (OVERALL): 1069 - 1205 MM

WIDTH: 640 MM

LENGTH: 658-806 MM

WEIGHT: 16 KG

PLATE ENTRY HEIGHT: 831 - 1034 MM

MAX. PLATE SIZE: 745 X 605 X 0,30 MM

MIN. PLATE SIZE: 400 X 510 X 0,15 MM

TILT SPEED: 13 SECONDS

CAPACITY: 100 PLATES (0,15) AND 50 PLATES (0,30)

POWER REQUIREMENTS: SINGLE PHASE: 100/115/200/230 VAC + PE, 50-60 HZ

APPROVALS: COMPLIES WITH CE STANDARDS, THE RoHS DIRECTIVE AND WEEE

For further information please visit our website: [Smart Stacker XXS](http://www.reinsch.de)